



Short-circuit protective breaker, Iu 1 A, I_{rm} 15.5 A, Screw terminals, Also suitable for motors with efficiency class IE3.




Part no. **PKM0-1**
 Catalog No. **072724**
 Alternate Catalog No. **XTPM001BNL**

Delivery program

| | | | | |
|---|-----------------|----|--|--|
| Product range | | | | PKM0 motor protective circuit-breakers up to 32 A |
| Basic function | | | | Short-circuit protective device only |
| | | | | |
| Notes | | | | Also suitable for motors with efficiency class IE3. IE3-ready devices are identified by the logo on their packaging. |
| Connection technique | | | | Screw terminals |
| Contact sequence | | | | |
| Max. motor rating | | | | |
| AC-3 | | | | |
| 220 V 230 V 240 V | P | kW | | 0.12 |
| 380 V 400 V 415 V | P | kW | | 0.25 |
| 440 V | P | kW | | 0.25 |
| 500 V | P | kW | | 0.38 |
| 660 V 690 V | P | kW | | 0.55 |
| Rated uninterrupted current | I _u | A | | 1 |
| Setting range | | | | |
| short-circuit release | | | | |
| | | | | |
| max. | I _{rm} | A | | 15.5 |
| Notes An appropriate overload relay must be fitted to protect motors against overload. Can be snapped on to IEC/EN 60715 top-hat rail with 7.5 or 15 mm height. Refer to catalog CA034001DE for the allocation of short circuit protection and contactor | | | | |
| Notes | | | | |
| Beim Einsatz des PKM0 als Kurzschlusschutz von schwer anlaufenden Motoren muss der Bemessungsbetriebsstrom I _e bei der Projektierung der Schaltgeräte mit den folgenden Faktoren überdimensioniert werden: | | | | |
| CLASS 5: | | | | 1,0 |
| CLASS 10: | | | | 1,0 |
| CLASS 15: | | | | 1,22 |
| CLASS 20: | | | | 1,41 |
| CLASS 25: | | | | 1,58 |
| CLASS 30: | | | | 1,73 |
| CLASS 35: | | | | 1,89 |
| CLASS 40: | | | | 2,0 |

Technical data

| | | | | |
|---------------------|--|----|--|--|
| General | | | | |
| Standards | | | | IEC/EN 60947, VDE 0660 |
| Climatic proofing | | | | Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature | | | | |
| Storage | | °C | | - 40 - 80 |

| | | |
|---|-----------------|--|
| Open | °C | -25 - +55 |
| Enclosed | °C | - 25 - 40 |
| Mounting position | |  |
| Direction of incoming supply | | as required |
| Degree of protection | | |
| Device | | IP20 |
| Terminations | | IP00 |
| Protection against direct contact when actuated from front (EN 50274) | | Finger and back-of-hand proof |
| Mechanical shock resistance half-sinusoidal shock 10 ms to IEC 60068-2-27 | g | 25 |
| Altitude | m | Max. 2000 |
| Terminal capacity main cable | | |
| Screw terminals | | |
| Solid | mm ² | 1 x (1 - 6) 2 x (1 - 6) |
| Flexible with ferrule to DIN 46228 | mm ² | 1 x (1 - 6) 2 x (1 - 6) |
| Solid or stranded | AWG | 18 - 10 |
| Stripping length | mm | 10 |
| Specified tightening torque for terminal screws | | |
| Main cable | Nm | 1.7 |
| Control circuit cables | Nm | 1 |

Main conducting paths

| | | | |
|---|-------------|---------------|--------------------------|
| Rated impulse withstand voltage | U_{imp} | V AC | 6000 |
| Overvoltage category/pollution degree | | | III/3 |
| Rated operational voltage | U_e | V AC | 690 |
| Rated uninterrupted current = rated operational current | $I_u = I_e$ | A | 1 |
| Rated frequency | f | Hz | 40 - 60 |
| Current heat loss (3 pole at operating temperature) | | W | 5.33 |
| Impedance per pole | | mΩ | 1700 |
| Lifespan, mechanical | Operations | $\times 10^6$ | 0.1 |
| Lifespan, electrical (AC-3 at 400 V) | | | |
| Lifespan, electrical | Operations | $\times 10^6$ | 0.1 |
| Max. operating frequency | | Ops/h | 40 |
| Motor switching capacity | | | |
| AC-3 (up to 690V) | | A | 1 |
| DC-5 (up to 250V) | | A | 1 (3 contacts in series) |

Trip blocks

| | | | |
|---|----|-------------|--|
| Temperature compensation | | | |
| to IEC/EN 60947, VDE 0660 | °C | - 5 ... 40 | |
| Operating range | °C | - 25 ... 55 | |
| Temperature compensation residual error for $T > 40$ °C | | | ≤ 0.25 %/K |
| short-circuit release | | | Basic device, fixed: $15.5 \times I_u$ |
| Short-circuit release tolerance | | | ± 20 % |

Design verification as per IEC/EN 61439

| | | | |
|--|------------|-----|------|
| Technical data for design verification | | | |
| Rated operational current for specified heat dissipation | I_n | A | 1 |
| Heat dissipation per pole, current-dependent | P_{vid} | W | 1.78 |
| Equipment heat dissipation, current-dependent | P_{vid} | W | 5.33 |
| Static heat dissipation, non-current-dependent | P_{vs} | W | 0 |
| Heat dissipation capacity | P_{diss} | W | 0 |
| Operating ambient temperature min. | °C | -25 | |

| | | |
|--|----|--|
| Operating ambient temperature max. | °C | 55 |
| IEC/EN 61439 design verification | | |
| 10.2 Strength of materials and parts | | |
| 10.2.2 Corrosion resistance | | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures | | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat | | Meets the product standard's requirements. |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects | | Meets the product standard's requirements. |
| 10.2.4 Resistance to ultra-violet (UV) radiation | | Meets the product standard's requirements. |
| 10.2.5 Lifting | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions | | Meets the product standard's requirements. |
| 10.3 Degree of protection of ASSEMBLIES | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.4 Clearances and creepage distances | | Meets the product standard's requirements. |
| 10.5 Protection against electric shock | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.7 Internal electrical circuits and connections | | Is the panel builder's responsibility. |
| 10.8 Connections for external conductors | | Is the panel builder's responsibility. |
| 10.9 Insulation properties | | |
| 10.9.2 Power-frequency electric strength | | Is the panel builder's responsibility. |
| 10.9.3 Impulse withstand voltage | | Is the panel builder's responsibility. |
| 10.9.4 Testing of enclosures made of insulating material | | Is the panel builder's responsibility. |
| 10.10 Temperature rise | | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.12 Electromagnetic compatibility | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.13 Mechanical function | | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |

Technical data ETIM 7.0

| | | |
|---|----|--|
| Low-voltage industrial components (EG000017) / Motor protection circuit-breaker (EC000074) | | |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Motor protection circuit-breaker (ecl@ss10.0.1-27-37-04-01 [AGZ529016]) | | |
| Overload release current setting | A | 0 - 0 |
| Adjustment range undelayed short-circuit release | A | 15.5 - 15.5 |
| With thermal protection | | No |
| Phase failure sensitive | | No |
| Switch off technique | | Magnetic |
| Rated operating voltage | V | 690 - 690 |
| Rated permanent current I _u | A | 1 |
| Rated operation power at AC-3, 230 V | kW | 0.12 |
| Rated operation power at AC-3, 400 V | kW | 0.25 |
| Type of electrical connection of main circuit | | Screw connection |
| Type of control element | | Turn button |
| Device construction | | Built-in device fixed built-in technique |
| With integrated auxiliary switch | | No |
| With integrated under voltage release | | No |
| Number of poles | | 3 |
| Rated short-circuit breaking capacity I _{cu} at 400 V, AC | kA | 150 |
| Degree of protection (IP) | | IP20 |
| Height | mm | 93 |
| Width | mm | 45 |
| Depth | mm | 76 |


Approvals

| | | |
|--------------------------------------|--|----|
| Specially designed for North America | | No |
|--------------------------------------|--|----|

Characteristics





- 1: Standard auxiliary contact
- 2: Trip-indicating auxiliary contact
- 3: Shunt releases, undervoltage releases

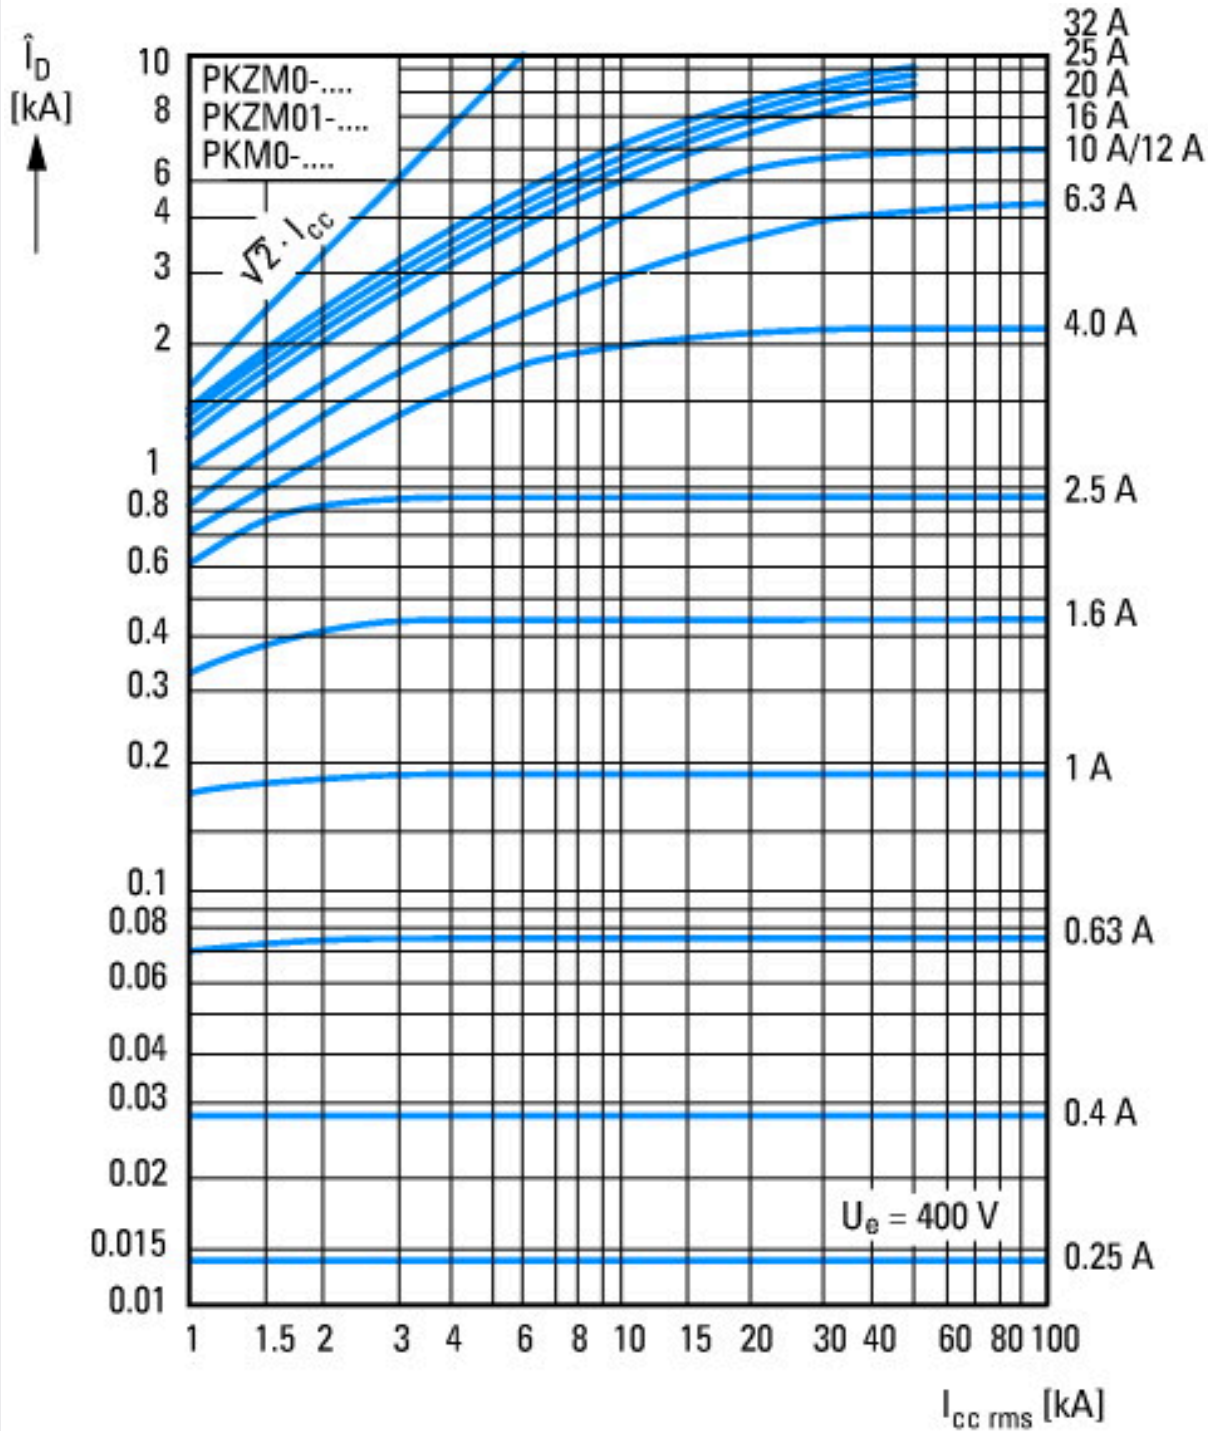



Let-through current



Dimensions

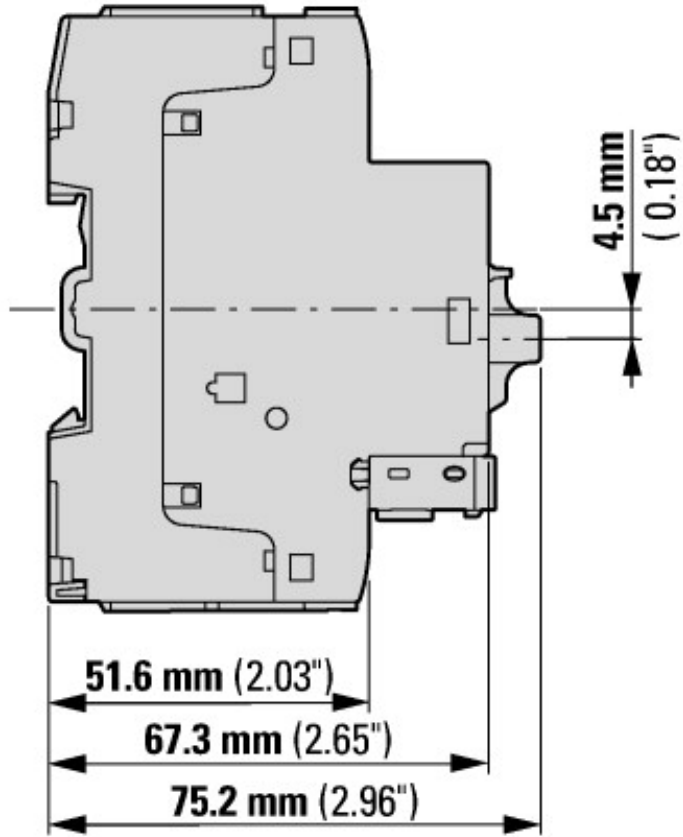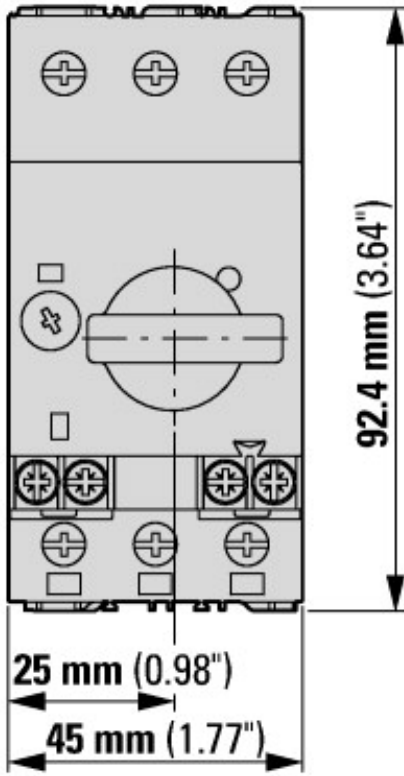

Motor-protective circuit-breaker with standard auxiliary contact
 PKZM0-...(+NHI-E-...-PKZ0)
 PKZM0-...-T(+NHI-E-...-PKZ0)
 PKM0-...(+NHI-E-...-PKZ0)

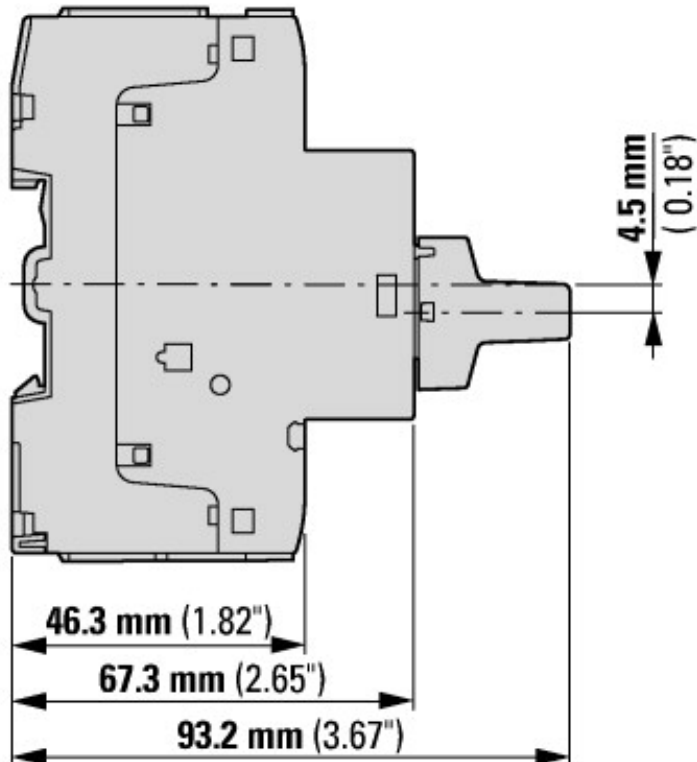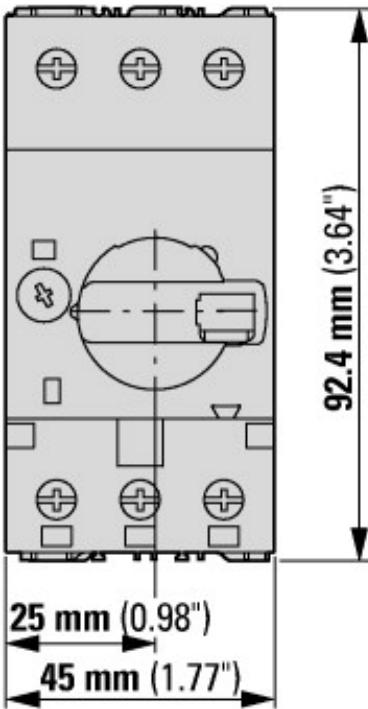

Motor-protective circuit-breakers with lockable rotary handles
 PKZM0-...+AK-PKZ0



Motor-protective circuit-breakers with early-make auxiliary contacts
PKZM0-...+VHI-...-PKZ0

Additional product information (links)

IL03407011Z (AWA1210-1925) Motor-protective circuit-breaker

IL03407011Z (AWA1210-1925) Motor-protective circuit-breaker https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407011Z2018_04.pdf

'IL03402034Z (AWA121-1945) Motor-protective circuit-breaker, Starter

'IL03402034Z (AWA121-1945) Motor-protective circuit-breaker, Starter https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL03402034Z2018_06.pdf

Schaltvermögen <http://de.ecat.eaton.com/flip-cat/?edition=HPLTEv1&startpage=>

Motor starters and "Special Purpose Ratings" for the North American market http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf

Busbar Component Adapters for modern Industrial control panels http://www.moeller.net/binary/ver_techpapers/ver960en.pdf